

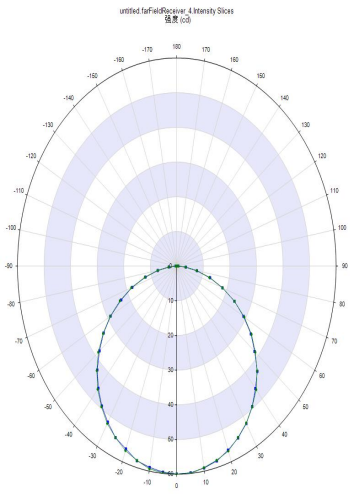


Product specification

Product name	Led puck lights	Model	PL-3led
Product picture		packing picture	
			
Electrical parameters		Light source parameters	
• Rated working voltage	DC12V	• LED Qty	5050RGB*3
• Rated power	0.7W	• LED Brand	≤Epistar
• wire specification	3*0.32mm ² / φ 2mm	• Light source life	≥30000H
• Line sequence definition		Optical parameters	
• PCS/ Strand	5pcs/strand 10pcs/strand	• Gray scale	8 Bit 256
• length(M)	1M	• Brightness	/
• control mode	TTLRGB	• Luminous intensity	/
• Control chip	WS2811	• Wavelength	RGB (R:615-630nm G:525-545nm B:460-480nm)
• Pixel spacing	20cm/10cm	• Color temperature	/
Mechanical parameters		• LED Beam	120°±10%
• Body	PC+APS	• Typical Lumen	10.75lm
• Cover	PC +APS	Lighting Distribution	
• Shell color	Without shell/Milk white		
• Net Weight	40g		
• pigtails	Xconnect/Ray 13.5mm		
• package	5ct:100 strands/box , 21kg/box 10ct:50 strands/box , 21kg/box		
Others			
• Oper Temp	-20°C~+60°C		
• Storage Temp	-40°C~+75°C		
• UV resistance	Yes		
• IP rated	IP67		